







Catalog #:  Type:   
 Project:  Date:   
 Prepared By:   
 Comments:

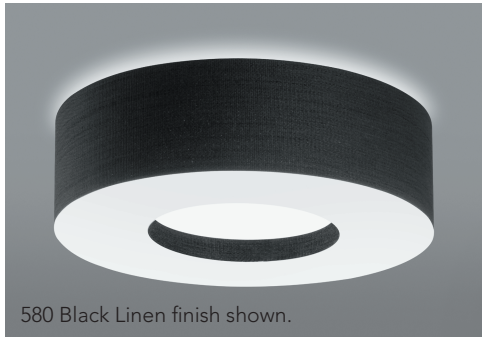

Size	A	B
11"	12" [305 mm]	3.91" [99 mm]
14"	15" [381 mm]	4.91" [125 mm]
19"	19" [483 mm]	5.66" [144 mm]

Product Weight: 2.3-6.2 lbs. by size, mounting.

**FEATURES**

The Donut drum is a simple geometric luminaire with a perimeter skirt and lower diffused surface that obscures the diodes for uniform, glare-free illumination. The CCDON compliments applications including hotels, restaurants and residential facilities. Available in a variety of configurations and finish options.

**MECHANICAL**

- Standard 20-gauge light engine housing compatible with all available shades.

**OPTICAL**

- Available in 11", 14" & 19" diameters.<sup>1</sup>
- 100% acrylic non-yellowing diffusers with DR additive.
- Sonically and chemically welded joints will not yellow.
- Perimeter skirt available in white satin acrylic or with 100% polyester fabric fused to acrylic sheet, available in a variety of patterns.
- Diffused acrylic lower outer & inner donut panels.
- Washable with mild soap and water.
- Custom shapes, designs & finishes also available.
- 3000K, 90CRI<sup>2</sup>

**WARRANTY**

- 5-year limited warranty.

**ELECTRICAL**

- Integral electronic driver, 120V, 60 Hz.<sup>2</sup>
- Dimmable to 10% via standard Triac dimmer.

**MOUNTING**

- Available in surface & cable configurations.
- Cable configuration suspends from three adjustable cables & clear conductor. 96" max. suspension length.
- Shades mechanically attach to housing with three tool-less fasteners.
- Mounts to standard 4" recessed j-box (by others).

**CERTIFICATIONS**

- UL damp listed to US and Canadian safety standards.
- Meets Energy Star requirements.
- Compliant with JA8-2019 requirements of California Title 24.
- RoHS compliant.

(1) Nominal diameter. See line drawings for actual dimensions.

(2) Contact Sales at Sales@rlrindinc.com for non-cataloged & custom configurations.

**TECHNICAL**

L70 Life:	>54,000 hours
Color Consistency:	5-Step SDCM
Max. Ambient Temperature:	45° C
Min. Starting Temperature:	-20° C
Sound Rating:	Class A
Power Factor:	>0.90
THD:	<20%

**LIGHT ENGINE DATA**

	Light Engine Lumens <sup>3</sup>	Input Power	Light Engine Efficacy	120V Current
17W	1,530 lm	16.9 W	90.6 LPW	0.14 A
25W	2,273 lm	24.8 W	91.5 LPW	0.22 A
32W	2,977 lm	32.0 W	93.0 LPW	0.28 A

(3) Luminaire lumens are lower due to optical losses from shade.

**ORDERING INFORMATION**


Example: 32W-3090-PM-BN-C19-CCDON-580

32W	-	3090	-	PM	BN	-	C19	-	CCDON	-	580	-	
-----	---	------	---	----	----	---	-----	---	-------	---	-----	---	--


<b>WATTAGE</b>	<b>LED COLOR<sup>1</sup></b>	<b>MOUNTING</b>	<b>CANOPY COVER FINISH</b>	<b>DIAMETER<sup>3</sup></b>	<b>SHADE STYLE</b>	<b>SHADE FINISH</b> <small>(See photos below)</small>	<b>SHADE OPTIONS</b> <small>(See photos below)</small>
17W 25W 32W	3000K, 90CRI	SM = Surface Mount PM = Cable Mount	Blank = Surface Mount WH = White <sup>2</sup> BN = Brushed Nickel Finish <sup>2</sup>	C11 = 11" (17W only) C14 = 14" (25W only) C19 = 19" (32W only)	CCDON = Donut	217 = White Satin 555 = Jute 655 = Double Laminated Jute <sup>4</sup> 556 = Chocolate Linen 557 = Rapids 558 = White Linen 658 = Double Laminated White Linen <sup>4</sup> 010 = Opaque Metallic Nickel 104 = Opaque Metallic Bronze 570 = Gray Slate 580 = Black Linen	Blank = No Option BNT = Brushed Nickel Trim BZT = Bronze Trim

- (1) Contact Sales at Sales@rlrindinc.com for non-cataloged & custom configurations.
- (2) Indicate WH or BN finish for Cable Mount (PM) models only.
- (3) Nominal diameter. See line drawings for actual dimensions.
- (4) Double laminated finish provides 2<sup>nd</sup> outer layer of clear acrylic with light texture for improved wipe-down and reduced dirt accumulation.

**SHADE FINISHES**

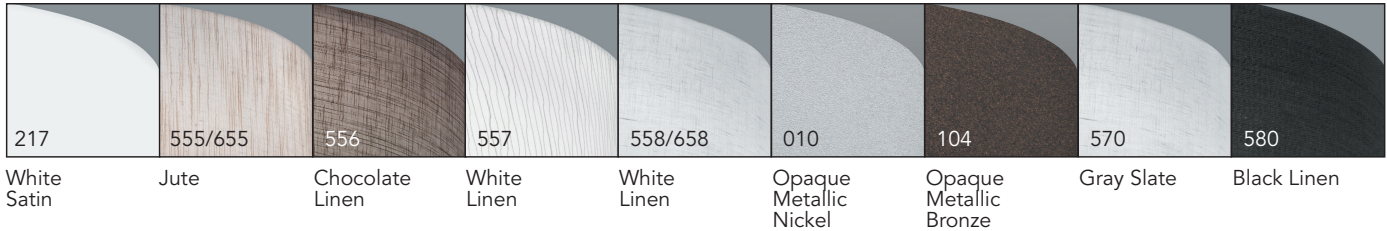

**SHADE OPTIONS**

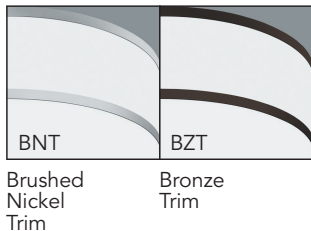

**COMPATIBLE DIMMER LIST**

The following dimmers have been tested and verified as compatible. Additional dimmers may be compatible but have not been tested.

Lutron MACL-153M	Leviton IPL06-10Z
Lutron TGCL-153P	Leviton 6674-P0W
Lutron CTCL-153P	Leviton 6672-1LW
Lutron PD-6WCL	Leviton DLS06-1LZ

<p><b>RLR Industries, Inc.</b> 575 Discovery Place Mableton, GA 30126</p>	<p>www.rlrindinc.com Sales Inquiries: Sales@rlrindinc.com 770-948-6069</p>
---	--