






Catalog #:  Type:   
 Project:  Date:   
 Prepared By:   
 Comments:



Size	A	B
11"	12.25" [311 mm]	6.31" [160 mm]
14"	15.00" [381 mm]	6.37" [162 mm]
19"	19.25" [489 mm]	6.40" [163 mm]

Product Weight: 2.3-6.3 lbs. by size, mounting.

**FEATURES**

The Double Tier Round drum features double nested perimeter skirts with lower diffused surfaces to obscure diode brightness for uniform, glare-free illumination. The CCFD provides an understated appearance for applications including hotels, restaurants and residential facilities. Available in a variety of configurations and finish options.

**MECHANICAL**

- Standard 20-gauge light engine housing compatible with all available shades.

**OPTICAL**

- Available in 11", 14" & 19" diameters.<sup>1</sup>
- 100% acrylic non-yellowing diffusers with DR additive.
- Sonically and chemically welded joints will not yellow.
- Perimeter skirt available in white satin acrylic or with 100% polyester fabric fused to acrylic sheet, available in a variety of patterns.
- Diffused acrylic lower panels.
- Washable with mild soap and water.
- Custom shapes, designs & finishes also available.
- 3000K, 90CRI<sup>2</sup>

**WARRANTY**

- 5-year limited warranty.

(1) Nominal diameter. See line drawings for actual dimensions.  
 (2) Contact Sales at Sales@rlrindinc.com for non-cataloged & custom configurations.

**ELECTRICAL**

- Integral electronic driver, 120V, 60 Hz.<sup>2</sup>
- Dimmable to 10% via standard Triac dimmer.

**MOUNTING**

- Available in surface & cable configurations.
- Cable configuration suspends from three adjustable cables & clear conductor. 96" max. suspension length.
- Shades mechanically attach to housing with three tool-less fasteners.
- Mounts to standard 4" recessed j-box (by others).

**CERTIFICATIONS**

- UL damp listed to US and Canadian safety standards.
- Meets Energy Star requirements.
- Compliant with JA8-2019 requirements of California Title 24.
- RoHS compliant.

**TECHNICAL**

L70 Life:	>54,000 hours
Color Consistency:	5-Step SDCM
Max. Ambient Temperature:	45° C
Min. Starting Temperature:	-20° C
Sound Rating:	Class A
Power Factor:	>0.90
THD:	<20%

**LIGHT ENGINE DATA**

	Light Engine Lumens <sup>3</sup>	Input Power	Light Engine Efficacy	120V Current
17W	1,530 lm	16.9 W	90.6 LPW	0.14 A
25W	2,273 lm	24.8 W	91.5 LPW	0.22 A
32W	2,977 lm	32.0 W	93.0 LPW	0.28 A

(3) Luminaire lumens are lower due to optical losses from shade.

**ORDERING INFORMATION**


Example: 25W-3090-PMBN-C14-CCFD-570

25W	-	3090	-	PM	BN	-	C14	-	CCFD	-	570	-	
-----	---	------	---	----	----	---	-----	---	------	---	-----	---	--


WATTAGE	LED COLOR <sup>1</sup>	MOUNTING	CANOPY COVER FINISH	DIAMETER <sup>3</sup>	SHADE STYLE	SHADE FINISH	SHADE OPTIONS
17W	3000K, 90CRI	SM = Surface Mount	Blank = Surface Mount	C11 = 11" (17W only)	CCFD = Double Tier Drum	(See photos below)	(See photos below)
25W		PM = Cable Mount	WH = White <sup>2</sup>	C14 = 14" (25W only)		217 = White Satin	Blank = No Option
32W			BN = Brushed Nickel Finish <sup>2</sup>	C19 = 19" (32W only)		555 = Jute	BNT = Brushed Nickel Trim
						655 = Double Laminated Jute <sup>4</sup>	BZT = Bronze Trim
						556 = Chocolate Linen	
						557 = Rapids	
						558 = White Linen	
						658 = Double Laminated White Linen <sup>4</sup>	
						010 = Opaque Metallic Nickel	
						104 = Opaque Metallic Bronze	
						570 = Gray Slate	
						580 = Black Linen	

- (1) Contact Sales at Sales@rlrindinc.com for non-cataloged & custom configurations.
- (2) Indicate WH or BN finish for Cable Mount (PM) models only.
- (3) Nominal diameter. See line drawings for actual dimensions.
- (4) Double laminated finish provides 2<sup>nd</sup> outer layer of clear acrylic with light texture for improved wipe-down and reduced dirt accumulation.

**SHADE FINISHES**

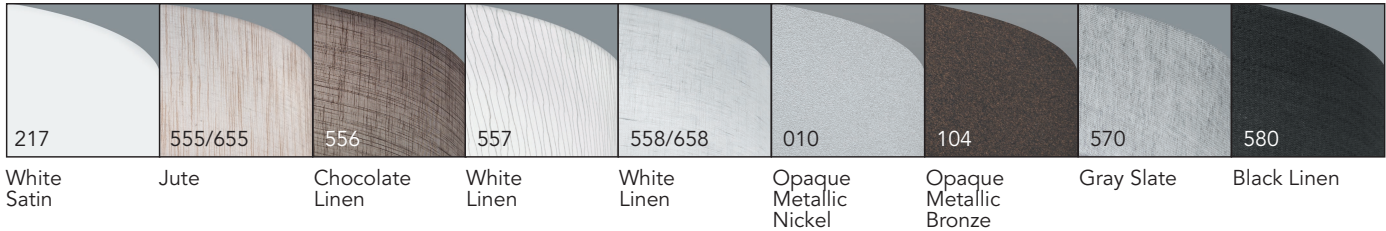

**SHADE OPTIONS**



**COMPATIBLE DIMMER LIST**

The following dimmers have been tested and verified as compatible. Additional dimmers may be compatible but have not been tested.

Lutron MACL-153M	Leviton IPL06-10Z
Lutron TGCL-153P	Leviton 6674-POW
Lutron CTCL-153P	Leviton 6672-1LW
Lutron PD-6WCL	Leviton DLS06-1LZ

<p><b>RLR Industries, Inc.</b> 575 Discovery Place Mableton, GA 30126</p>	<p>www.rlrindinc.com Sales Inquiries: Sales@rlrindinc.com 770-948-6069</p>
---	--