

Product Weight: 1.5-6.3 lbs. by size, mounting.

**FEATURES**

The Tapered Round drum compliments a wide range of interiors with a clean conical form consisting of a tapered perimeter skirt and lower diffused surface to provide soft, glare-free illumination. The CCTAP is available in a variety of configurations and finish options.

**MECHANICAL**

- Standard 20-gauge light engine housing compatible with all available shades.

**OPTICAL**

- Available in 14" nominal, 15" actual diameter only.
- 100% acrylic non-yellowing diffusers with DR additive.
- Sonically and chemically welded joints will not yellow.
- Perimeter skirt available in white satin acrylic or with 100% polyester fabric fused to acrylic sheet, available in a variety of patterns.
- Diffused acrylic lower panels.
- Washable with mild soap and water.
- Custom shapes, designs & finishes also available.
- 3000K, 90CRI<sup>2</sup>

**WARRANTY**

- 5-year limited warranty.

**ELECTRICAL**

- Integral electronic driver, 120V, 60 Hz.<sup>2</sup>
- Dimmable to 10% via standard Triac dimmer.

**MOUNTING**

- Available in surface & cable configurations.
- Cable configuration suspends from three adjustable cables & clear conductor. 96" max. suspension length.
- Shades mechanically attach to housing with three tool-less fasteners.
- Mounts to standard 4" recessed j-box (by others).

**CERTIFICATIONS**

- UL damp listed to US and Canadian safety standards.
- Meets Energy Star requirements.
- Compliant with JA8-2019 requirements of California Title 24.
- RoHS compliant.

(1) Nominal diameter. See line drawings for actual dimensions.

(2) Contact Sales at Sales@rlrindinc.com for non-cataloged & custom configurations.

**TECHNICAL**

L70 Life:	>54,000 hours
Color Consistency:	5-Step SDCM
Max. Ambient Temperature:	45° C
Min. Starting Temperature:	-20° C
Sound Rating:	Class A
Power Factor:	>0.90
THD:	<20%

**LIGHT ENGINE DATA**

	Light Engine Lumens <sup>2</sup>	Input Power	Light Engine Efficacy	120V Current
17W	1,530 lm	16.9 W	90.6 LPW	0.14 A
25W	2,273 lm	24.8 W	91.5 LPW	0.22 A
32W	2,977 lm	32.0 W	93.0 LPW	0.28 A

(2) Luminaire lumens are lower due to optical losses from shade.

RLR Industries, Inc.  
575 Discovery Place  
Mableton, GA 30126

www.rlrindinc.com  
Sales Inquiries: Sales@rlrindinc.com  
770-948-6069

## ORDERING INFORMATION

Example: 25W-3090-SMBN-C14-CCTAP-570

25W	-	3090	-	SM	BN	-	C14	-	CCTAP	-	570
-----	---	------	---	----	----	---	-----	---	-------	---	-----

**WATTAGE**  
25W

**LED COLOR<sup>1</sup>**  
3000K, 90CRI

**MOUNTING**  
SM = Surface Mount  
PM = Cable Mount

**CANOPY COVER FINISH**  
Blank = Surface Mount  
WH = White<sup>2</sup>  
BN = Brushed Nickel Finish<sup>2</sup>


**DIAMETER<sup>3</sup>**  
C14 = 14" (25W only)

**SHADE STYLE**  
CCTAP = Tapered Round

**SHADE FINISH**  
(See photos below)  
217 = White Satin  
555 = Jute  
655 = Double Laminate Jute<sup>4</sup>  
556 = Chocolate Linen  
557 = Rapids  
558 = White Linen  
658 = Double Laminated White Linen<sup>4</sup>  
570 = Gray Slate  
580 = Black Linen

- (1) Contact Sales at Sales@rlrindinc.com for non-cataloged & custom configurations.
- (2) Indicate WH or BN finish for Cable Mount (PM) models only.
- (3) Nominal diameter. See line drawings for actual dimensions.
- (4) Double laminated finish provides 2<sup>nd</sup> outer layer of clear acrylic with light texture for improved wipe-down and reduced dirt accumulation.

## SHADE FINISHES

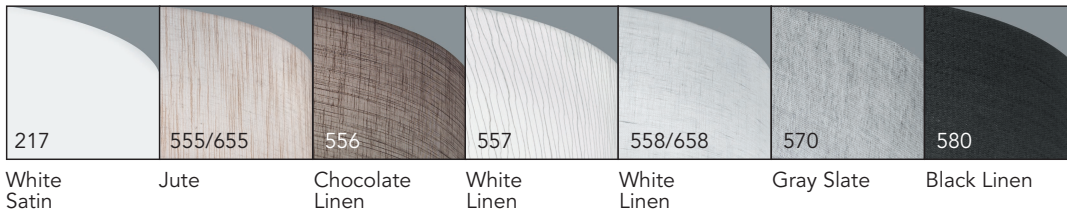

## COMPATIBLE DIMMER LIST

The following dimmers have been tested and verified as compatible. Additional dimmers may be compatible but have not been tested.

Lutron MACL-153M	Leviton IPL06-10Z
Lutron TGCL-153P	Leviton 6674-POW
Lutron CTCL-153P	Leviton 6672-1LW
Lutron PD-6WCL	Leviton DLS06-1LZ

**RLR Industries, Inc.**  
575 Discovery Place  
Mableton, GA 30126

www.rlrindinc.com  
Sales Inquiries: Sales@rlrindinc.com  
770-948-6069