






Catalog #: Type:
 Project: Date:
 Prepared By:
 Comments:



Front View



Side View



Top View

Face	A	B
CUB	7.5" [191 mm]	7.5" [191 mm]
CUBR	7.5" [191 mm]	10.75" [273 mm]

Product Weight: 1.5 lbs.

FEATURES

The Cube wall sconce is a rectilinear geometric form that provides a clean contemporary aesthetic and soft uniform illumination to interiors including hotels, restaurants, residential and other leisure applications. Available in a variety of configurations and finish options to add a signature appearance.

MECHANICAL

- Standard 20-gauge light engine housing compatible with all available shades.

OPTICAL

- Available in square (CUB) and rectangular (CUBR) shapes.
- 100% acrylic non-yellowing diffuser with DR additive available in white satin finish or with 100% polyester fabric fused to acrylic sheet, available in a variety of patterns.
- Sonically and chemically welded joints will not yellow.
- Washable with mild soap and water.
- Custom shapes, designs also available.
- 3000K, 90CRI¹

ELECTRICAL

- Integral electronic driver, 120V, 60 Hz.¹
- Dimmable to 10% via standard Triac dimmer.

MOUNTING

- Faces mechanically attach to housing with tool-less fasteners. CUBR can be mounted either vertically or horizontally.
- Mounts to standard 4" recessed j-box (by others).

CERTIFICATIONS

- UL damp listed to US and Canadian safety standards.
- Meets Energy Star requirements.
- Compliant with JA8-2019 requirements of California Title 24.
- Americans with Disabilities Act (ADA) compliant.
- RoHS compliant.

WARRANTY

- 5-year limited warranty.

(1) Contact Sales at Sales@rlrindinc.com for non-cataloged & custom configurations.

TECHNICAL

L70 Life:	>54,000 hours
Color Consistency:	5-Step SDCM
Max. Ambient Temperature:	45° C
Min. Starting Temperature:	-20° C
Sound Rating:	Class A
Power Factor:	>0.90
THD:	<20%

LIGHT ENGINE DATA

	Light Engine Lumens ²	Input Power	Light Engine Efficacy	120V Current
17W	1,530 lm	16.9 W	90.6 LPW	0.14 A

(2) Luminaire lumens are lower due to optical losses from shade.


ORDERING INFORMATION

Example: 17W-3090-WM-CUB-217

17W	-	3090	-	WM	-	CUB	-	217
-----	---	------	---	----	---	-----	---	-----

WATTAGE
17W**LED COLOR¹**
3000K, 90CRI**MOUNTING**
WM = Wall
Mount**FACE STYLE**
CUB = Cube
CUBR = Rectangular
Cube**FACE FINISH**
(See photos below)
217 = White Satin
555 = Jute
655 = Double Laminated Jute²
558 = White Linen
658 = Double Laminated
White Linen²

(1) Contact Sales at Sales@rlrindinc.com for non-cataloged & custom configurations.

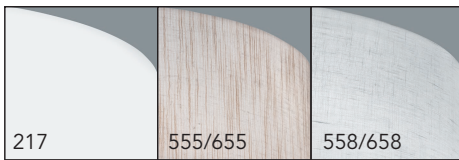(2) Double laminated finish provides 2nd outer layer of clear acrylic with light texture for improved wipe-down and reduced dirt accumulation.**FACE FINISHES**217
White
Satin555/655
Jute558/658
White
Linen**COMPATIBLE DIMMER LIST**

The following dimmers have been tested and verified as compatible. Additional dimmers may be compatible but have not been tested.

Lutron MACL-153M	Leviton IPL06-10Z
Lutron TGCL-153P	Leviton 6674-P0W
Lutron CTCL-153P	Leviton 6672-1LW
Lutron PD-6WCL	Leviton DLS06-1LZ

RLR Industries, Inc.
575 Discovery Place
Mableton, GA 30126

www.rlrindinc.com
Sales Inquiries: Sales@rlrindinc.com
770-948-6069