






Catalog #:  Type:   
 Project:  Date:   
 Prepared By:   
 Comments:



Front View



Side View



Top View

Product Weight: 2.2 lbs.

## FEATURES

The Double Frame wall sconce is a uniquely styled contemporary luminaire that provides a signature appearance to applications including hotels, restaurants, residential and other leisure applications. Available in a variety of configurations and finish options to add a signature appearance.

### MECHANICAL

- Standard 20-gauge light engine housing compatible with all available shades.

### OPTICAL

- 100% acrylic non-yellowing diffuser with DR additive available in white satin finish or with 100% polyester fabric fused to acrylic sheet, available in a variety of patterns.
- Sonically and chemically welded joints will not yellow.
- Painted opaque acrylic frame available in satin white or faux metallic nickel or bronze.
- Washable with mild soap and water.
- Custom shapes, designs also available.
- 3000K, 90CRI<sup>1</sup>

### WARRANTY

- 5-year limited warranty.

### ELECTRICAL

- Integral electronic driver, 120V, 60 Hz.<sup>1</sup>
- Dimmable to 10% via standard Triac dimmer.

### MOUNTING

- Faces mechanically attach to housing with tool-less fasteners.
- Mounts to standard 4" recessed j-box (by others).

### CERTIFICATIONS

- UL damp listed to US and Canadian safety standards.
- Meets Energy Star requirements.
- Compliant with JA8-2019 requirements of California Title 24.
- Americans with Disabilities Act (ADA) compliant.
- RoHS compliant.

(1)Contact Sales at Sales@rlrindinc.com for non-cataloged & custom configurations.

## TECHNICAL

L70 Life:	>54,000 hours
Color Consistency:	5-Step SDCM
Max. Ambient Temperature:	45° C
Min. Starting Temperature:	-20° C
Sound Rating:	Class A
Power Factor:	>0.90
THD:	<20%

## LIGHT ENGINE DATA

	Light Engine Lumens <sup>2</sup>	Input Power	Light Engine Efficacy	120V Current
17W	1,530 lm	16.9 W	90.6 LPW	0.14 A

(2) Luminaire lumens are lower due to optical losses from shade.

RLR Industries, Inc.  
575 Discovery Place  
Mableton, GA 30126

www.rlrindinc.com  
Sales Inquiries: Sales@rlrindinc.com  
770-948-6069

**ORDERING INFORMATION**

Example: 17W-3090-WM-DS-217-010

17W	-	3090	-	WM	-	DS	-	217	-	010
-----	---	------	---	----	---	----	---	-----	---	-----

**WATTAGE**

17W

**LED COLOR<sup>1</sup>**

3000K, 90CRI

**MOUNTING**WM = Wall  
Mount**FACE STYLE**DS = Double  
Frame**CENTER LENS FINISH**

(See photos below)

217 = White Satin

555 = Jute

655 = Double Laminated Jute<sup>2</sup>

558 = White Linen

658 = Double Laminated  
White Linen<sup>2</sup>**FRAME FINISH**


(See photos below)

010 = Opaque Metallic Nickel

104 = Opaque Metallic Bronze

118 = Opaque White

(1) Contact Sales at Sales@rlrindinc.com for non-cataloged &amp; custom configurations.

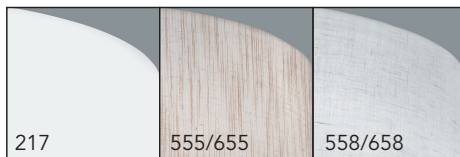(2) Double laminated finish provides 2<sup>nd</sup> outer layer of clear acrylic with light texture for improved wipe-down and reduced dirt accumulation.**CENTER LENS FINISHES**

217

White  
Satin

555/655

Jute

558/658

White  
Linen**FRAME FINISHES**

010

Opaque  
Metallic  
Nickel

104

Opaque  
Metallic  
Bronze

118

Opaque  
White**COMPATIBLE DIMMER LIST**

The following dimmers have been tested and verified as compatible. Additional dimmers may be compatible but have not been tested.

Lutron MACL-153M	Leviton IPL06-10Z
Lutron TGCL-153P	Leviton 6674-P0W
Lutron CTCL-153P	Leviton 6672-1LW
Lutron PD-6WCL	Leviton DLS06-1LZ

**RLR Industries, Inc.**  
575 Discovery Place  
Mableton, GA 30126

www.rlrindinc.com  
Sales Inquiries: Sales@rlrindinc.com  
770-948-6069