






Catalog #:  Type:   
 Project:  Date:   
 Prepared By:   
 Comments:



Product Weight: 1.4 lbs.

**FEATURES**

The Hourglass wall sconce is a unique modern form that provides soft uniform illumination to interiors including hotels, restaurants, residential and other leisure applications. Available in a variety of configurations and finish options to add a signature appearance.

**MECHANICAL**

- Standard 20-gauge light engine housing compatible with all available shades.

**OPTICAL**

- 100% acrylic non-yellowing diffusers with DR additive.
- Sonically and chemically welded joints will not yellow.
- Main face surface available in white satin finish or with 100% polyester fabric fused to acrylic sheet, available in a variety of patterns.
- Lens side panels are frosted white acrylic in satin finish.
- Washable with mild soap and water.
- Custom shapes, designs & finishes also available.
- 3000K, 90CRI<sup>1</sup>

**WARRANTY**

- 5-year limited warranty.

**ELECTRICAL**

- Integral electronic driver.
- 120V, 60 Hz.<sup>1</sup>
- Dimmable to 10% via standard Triac dimmer.

**MOUNTING**

- Faces mechanically attach to housing with tool-less fasteners and can be oriented either vertically or horizontally.
- Mounts to standard 4" recessed j-box (by others).

**CERTIFICATIONS**

- UL damp listed to US and Canadian safety standards.
- Meets Energy Star requirements.
- Compliant with JA8-2019 requirements of California Title 24.
- Americans with Disabilities Act (ADA) compliant.
- RoHS compliant.

(1) Contact Sales at Sales@rlrindinc.com for non-cataloged & custom configurations.

**TECHNICAL**

L70 Life:	>54,000 hours
Color Consistency:	5-Step SDCM
Max. Ambient Temperature:	45° C
Min. Starting Temperature:	-20° C
Sound Rating:	Class A
Power Factor:	>0.90
THD:	<20%

**LIGHT ENGINE DATA**

	Light Engine Lumens <sup>2</sup>	Input Power	Light Engine Efficacy	120V Current
17W	1,530 lm	16.9 W	90.6 LPW	0.14 A

(2) Luminaire lumens are lower due to optical losses from shade.


**ORDERING INFORMATION**

Example: 17W-3090-WM-HG-555

17W	-	3090	-	WM	-	HG	-	555
-----	---	------	---	----	---	----	---	-----

**WATTAGE**  
17W**LED COLOR<sup>1</sup>**  
3000K, 90CRI**MOUNTING**  
WM = Wall  
Mount**FACE STYLE**  
HG = Hourglass
**FACE FINISH**  
 (See photos below)  
 217 = White Satin  
 555 = Jute  
 655 = Double Laminated  
       Jute<sup>2</sup>  
 556 = Chocolate Linen  
 557 = Rapids  
 558 = White Linen  
 658 = Double Laminated  
       White Linen<sup>2</sup>  
 570 = Gray Slate  
 580 = Black Linen

(1) Contact Sales at Sales@rlrindinc.com for non-cataloged &amp; custom configurations.

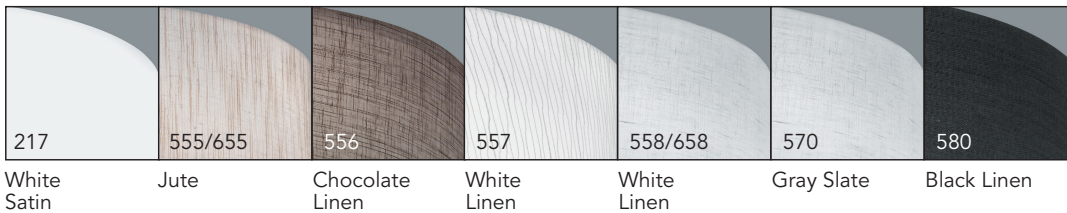(2) Double laminated finish provides 2<sup>nd</sup> outer layer of clear acrylic with light texture for improved wipe-down and reduced dirt accumulation.**FACE FINISHES****COMPATIBLE DIMMER LIST**

The following dimmers have been tested and verified as compatible. Additional dimmers may be compatible but have not been tested.

Lutron MACL-153M	Leviton IPL06-10Z
Lutron TGCL-153P	Leviton 6674-P0W
Lutron CTCL-153P	Leviton 6672-1LW
Lutron PD-6WCL	Leviton DLS06-1LZ

**RLR Industries, Inc.**  
 575 Discovery Place  
 Mableton, GA 30126

[www.rlrindinc.com](http://www.rlrindinc.com)  
 Sales Inquiries: [Sales@rlrindinc.com](mailto:Sales@rlrindinc.com)  
 770-948-6069